

**REQUEST FOR QUOTATION
RURAL MUNICIPALITY OF PINEY**

April 4, 2016

**The Supply only of
Bin type wall Structures
For
The Rural Municipality of Piney**

Request for Quotation

Rural Municipality of Piney

Issue Date: April 4, 2016
Closing Date: April 22, 2016
Closing Time: 1:00pm CST

The Rural Municipality of Piney is looking to purchase galvanized steel bin type wall materials for three transfer stations located within the Rural Municipality of Piney.

Scope of Quotation:

The Rural Municipality of Piney requests quotations on the supply of galvanized steel bin type wall materials for the fabrication of three transfer stations. The structure layout for all 3 sites is a 90 degree design as presented in Schedule "A" here attached. All transitions in height shall include a transition curb plate on the front face. Each of the three structures shall consist of:

- 1 - # 1 Bin (54.75" deep) x 48" high
- 1 - # 1 Bin (54.75" deep) x 96" high
- 4 - # 5 Bins (118.75" deep) x 64" high
- 1 - # 5 Bin (118.75" deep) x 80" high
- 1 - # 5 Bin (118.75" deep) x 96" high
- 7 - # 5 Bins (118.75" deep) x 112" high
- 5 – transition curb plates
- 1 – modified vertical connector

All front face stringers shall be a minimum of 14 gauge galvanized steel. Vertical connectors shall be a minimum 1/4" thick galvanized steel. Galvanized steel bin type wall shall be Bolt-A-Bin or approved equal. Quotes shall provide an itemized detail list of product being supplied with one lot price per transfer station. Materials shall include all necessary mounting hardware and installation/shop drawings. The successful supplier shall provide onsite technical support for two 8 hour days during assembly and backfill for each of the three structures.

All bids must include all costs, comprising: labour, delivery, material, mileage, and any other related charges. Quotes are to be in Canadian dollars, FOB jobsite on truck.

Timeline:

The product we are purchasing is to be delivered by June 3rd 2016 or upon agreement.

Fees:


Quotations and fees are to be inclusive. Additional supplies shall be issued by RFQ or letter of understanding. No funds will be released until the full delivery of product to the jobsite.

Completed quotations must be submitted by April 22, 2016 by 1:00pm to:

Rural Municipality of Piney
Attention: Martin Van Osch, C.A.O.
PO Box 48
Vassar, MB R0A 2J0
204-437-2284
martin@rmofpiney.mb.ca

The outside of each quotation must be clearly labeled:

"Quotation for Transfer Station Bin Wall", submitted by _____.

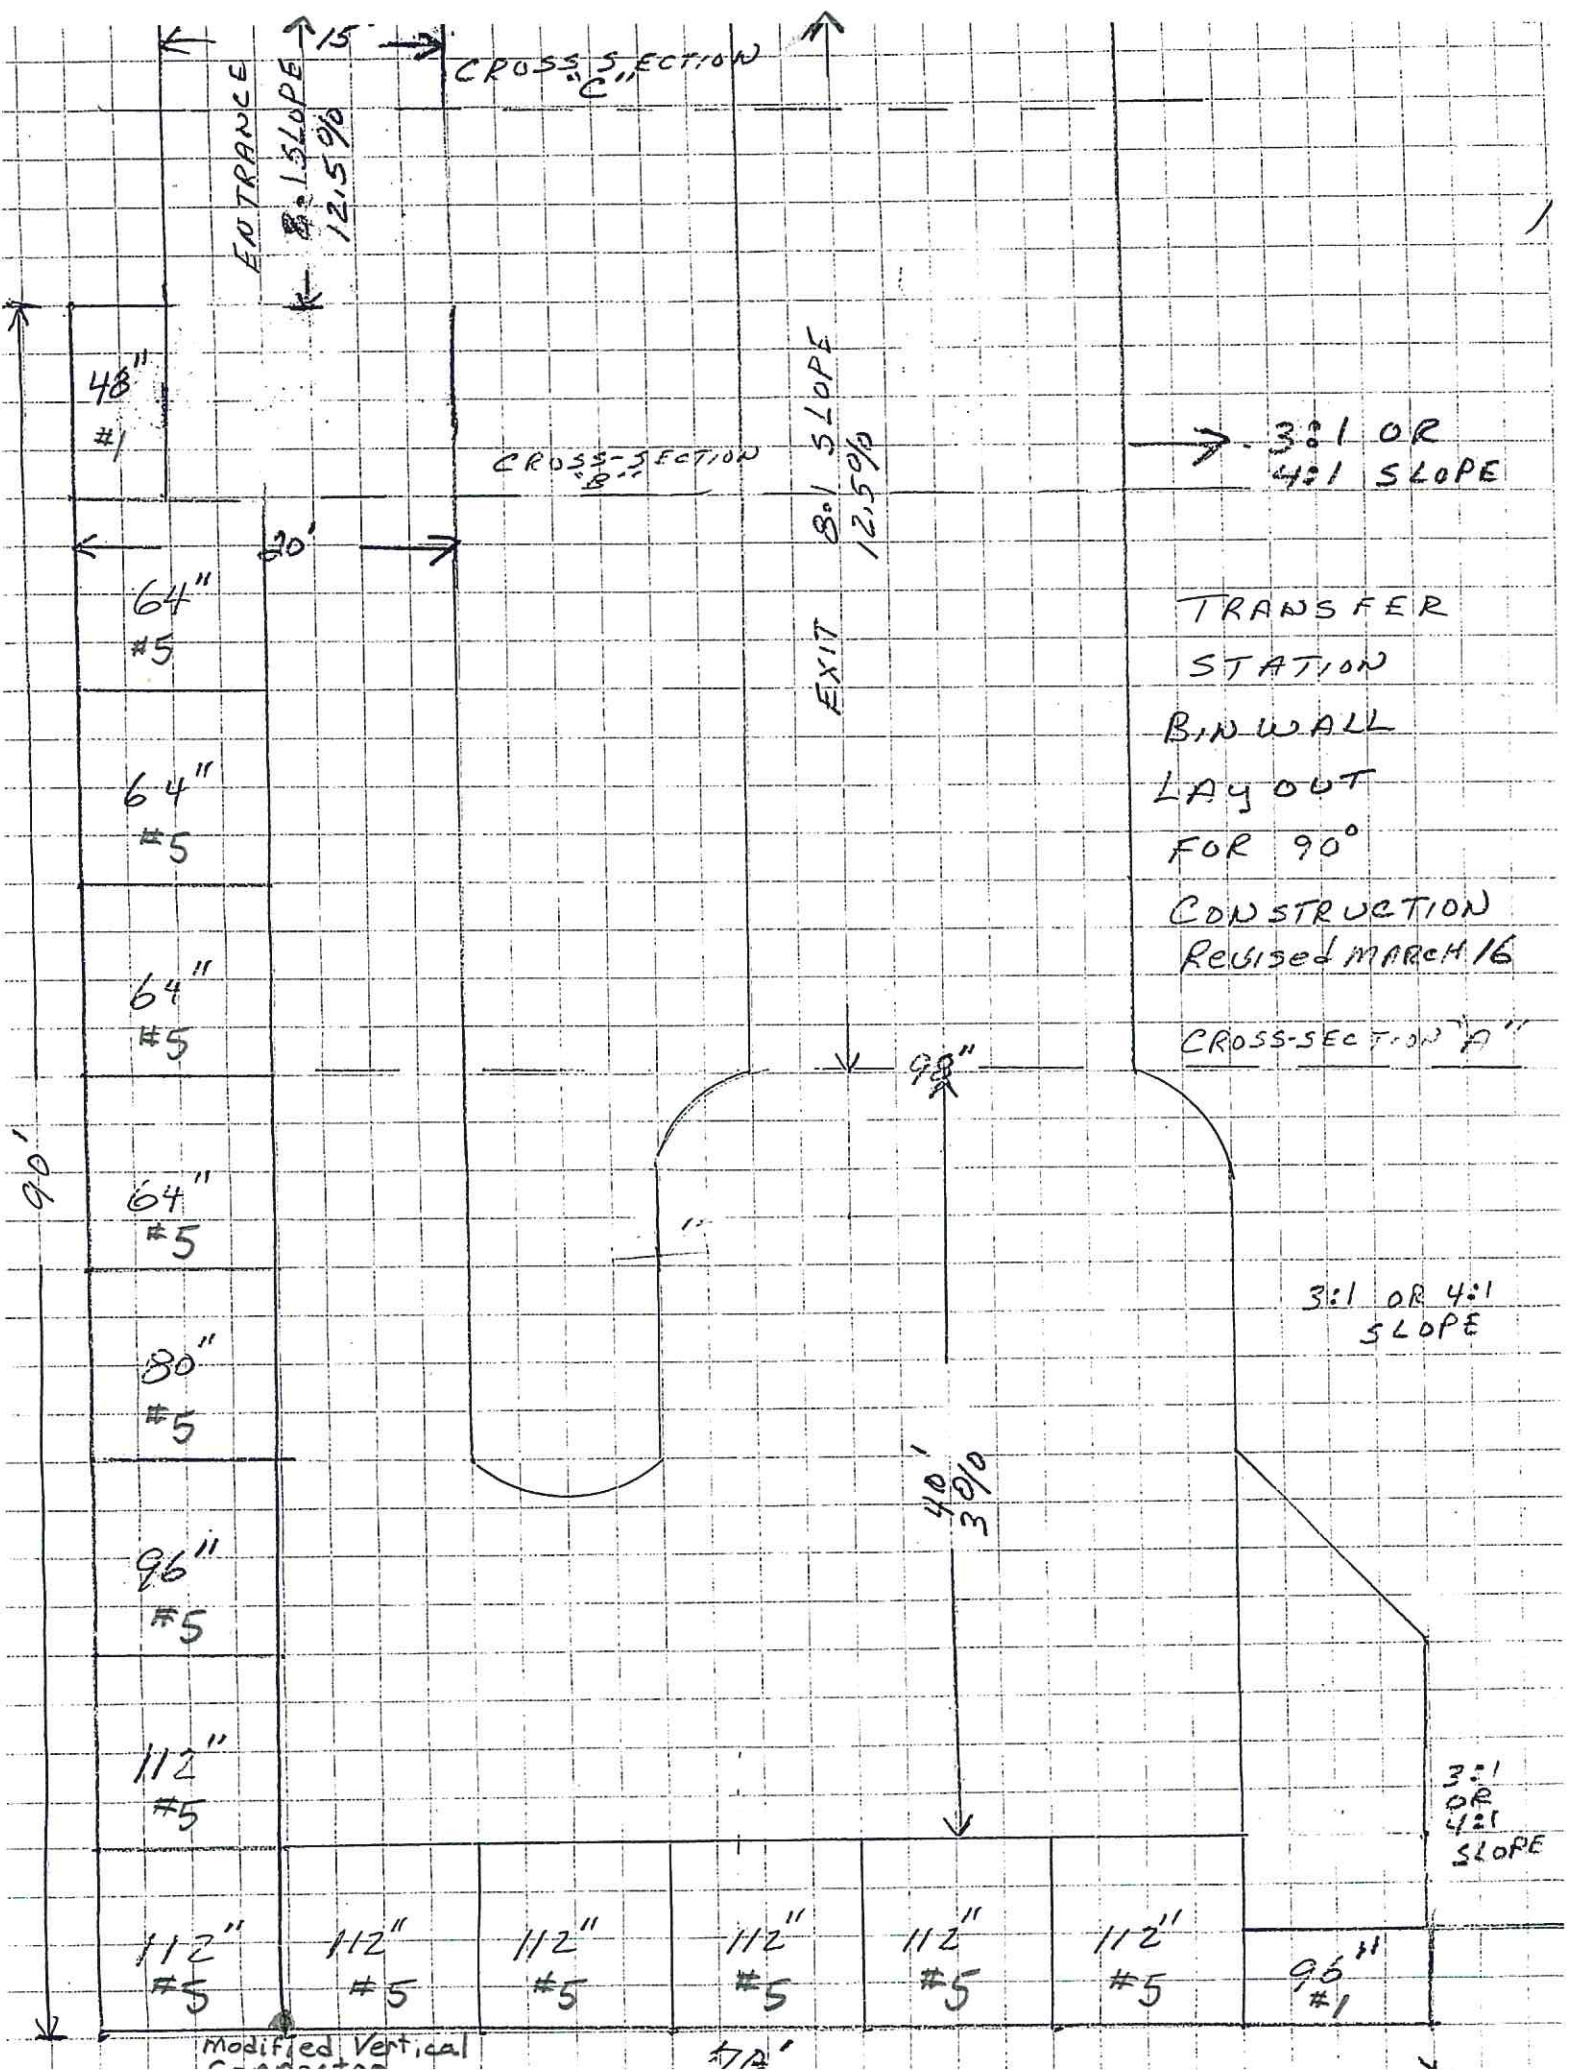

ENTRANCE

15'
8% SLOPE
12.5%

CROSS-SECTION C

CROSS-SECTION B

EXIT
8% SLOPE
12.5%

3:1 OR
4:1 SLOPE

TRANSFER
STATION
BIN WALL
LAYOUT
FOR 90°
CONSTRUCTION
REVISED MARCH 16

CROSS-SECTION A

3:1 OR 4:1
SLOPE

3:1
OR
4:1
SLOPE

48"
#5

64"
#5

64"
#5

64"
#5

64"
#5

80"
#5

96"
#5

112"
#5

112"
#5

112"
#5

112"
#5

112"
#5

112"
#5

112"
#5

96"
#5

90'

20'

90"

40'
3%

Modified Vertical

712'